


Product Presentation

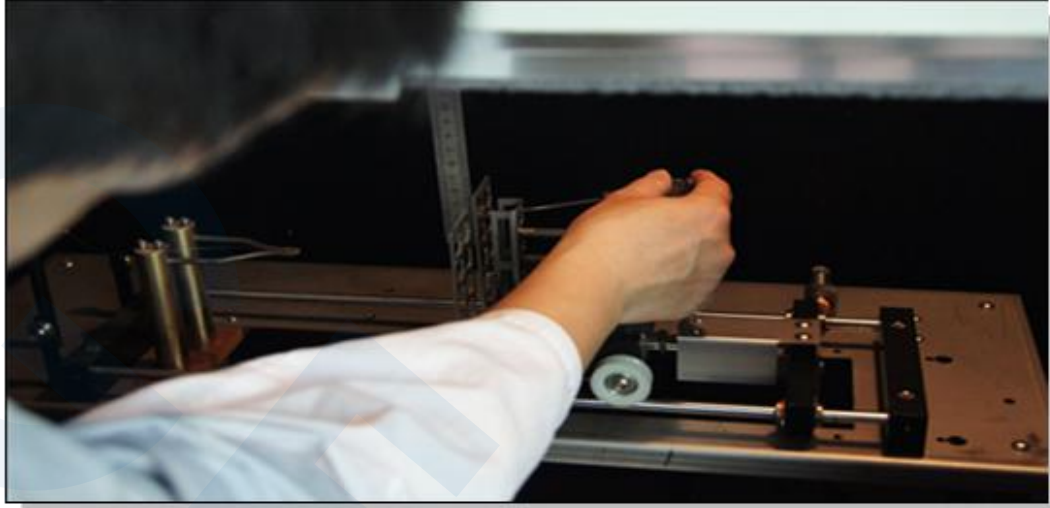

Application

Glow wire tester is the latest release of the flaming test equipment, with imports of touch-screen controller and instrument.

New test circuit, stable performance, reliable, simple and easy to operate. wide range of parameter adjustment. Apply to the latest test standards IEC60695,GB5169, etc.



Feature

- LCD Display, Programmable controller, touch-screen control system
- Full import control components.
- Special high-quality stainless steel clamps.
- Wireless remote control timing device.
- Advanced temperature control and measurement system.

Operation buttons




Operation buttons

Condition setting




Condition setting area

Temperature adjust

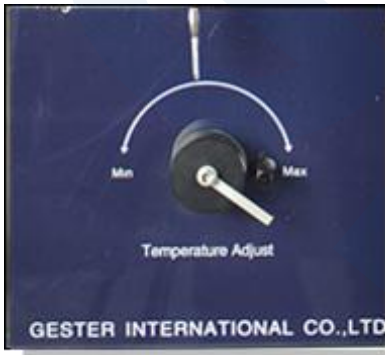


Temperature adjust

Internal structure

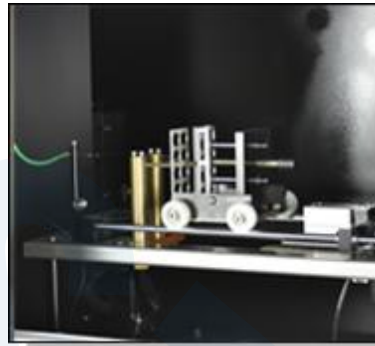

Internal structure

Internal structure

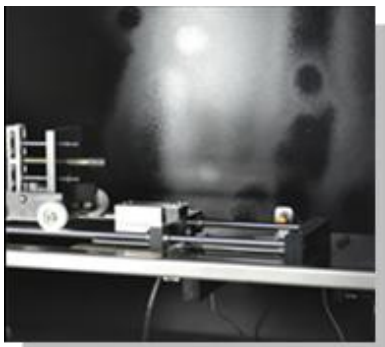

Internal structure

The side of the machine



The side of the machine

Key Specification

Standards	IEC60695 . GB5169
Outside dimension	1120x600x1020mm (L x W x H)
Glow wire	Φ4mm Ni/Cr(80/20)
Thermocouple	Φ0.5mm K type
Glow temperature	150degree ~1000 degree (may adjust)
Sample pressure	1.0N+/-0.1N
Sample move speed	10mm /s~25mm /s(may adjust)
Apply temperature time	0.01s~99.99s(may adjust)
Start burning time	0.01s~59m59.99s
Continue burning time	0.01s~59m59.99s
Power supply	Single-phase AC 220 v